

### Features

- Constant voltage output
- Built-in active PFC function
- Compatible with leading and trailing edge dimmers
- Supports Triac dimming; dimming depth  $\leq 1\%$
- High efficiency (typical value  $\geq 88\%$ )
- Flicker free
- All-round protections: over voltage protection, over load protection and short circuit protection
- IP20
- 5-year warranty (please refer to the warranty condition)



### Applications


· Horticultural lighting · indoor office lighting · decorative lighting · commercial lighting · residential lighting

### Descriptions

LF-GAT075-3125-24 is a 75W constant voltage Triac dimmable LED driver with 0-100% dimming range. Its rated input voltage ranges from 198 to 253Vac; its output voltage is 24Vdc and its rated output current is 3.125A. It has high efficiency and low THD. It is suitable for indoor constant voltage LED strip light, etc.

### Product Model

LF - GAT 075 - 3125 - 24

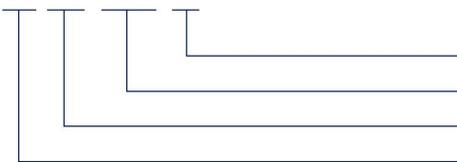

- 24: maximum output voltage: 24V
- 3125: maximum output current: 3125mA
- 075: rated output power: 75W
- GAT: CV Triac dimmable LED driver series

### Lifud Technology Co., Ltd.

Production Base I (HQ): Building B, Kutto Industrial Park, No.26, Xinhe Road, Bao'an District, Shenzhen City, China.  
Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Area, Meishan City, Sichuan, China.  
Website: [www.lifud.com](http://www.lifud.com) Telephone: +86(0)755 8373 9299 Email: [sales@lifud.com](mailto:sales@lifud.com)

### ■ Electrical Characteristics

Model		LF-GAT075-3125-24				
<b>Output</b>	Output Current	3125mA max.				
	Output Voltage	DC 24V				
	Output Power	75W max.				
	Flicker Index	IEC-Pst $\leq 1$ , CIE SVM $\leq 0.9$ , modulation depth $\leq 1\%$ Complies with flicker-free standard (IEEE Std 1789-2015)				
	Current Tolerance	$\pm 5\%$				
	Voltage Tolerance	24V $\pm 0.5V$				
	Temperature Drift	$\pm 10\%$				
<b>Input</b>	Input Voltage	220-240Vac (voltage limit: 198-253Vac)				
	DC Input Voltage	176-280Vdc				
	Input Frequency	47-63Hz				
	Input Current	0.6A max.				
	PF	$\geq 0.95@230Vac$ full load				
	THD	$\leq 18%@230Vac$ full load				
	Efficiency	$\geq 88%@220Vac@24V$ full load				
	Inrush Current	$\leq 50A$ & $300\mu S@230Vac$				
	Loading Quantities of Circuit Breaker	Model	B10	C10	B16	C16
		Quantity (pcs)	15	15	24	24
Leakage Current	$< 30V$					
<b>Protections</b>	Surge	L-N: 1kV				
	Open Circuit	Open-circuit voltage $\leq 30Vdc$				
	Short Circuit	Hiccup mode (auto-recovery)				
<b>Environment Descriptions</b>	Operating Temperature	$-20^{\circ}C \sim +45^{\circ}C$				
	Operating Humidity	20-90%RH (without condensation)				
	Storage Temperature/ Humidity	$-30^{\circ}C - 60^{\circ}C$ (6 months in Class I environment); 10-95%RH (without condensation)				
	Atmospheric Pressure	86-106kPa				

### ■ Electrical Characteristics


<b>Safety and EMC</b>	Certifications	TUV-ENEC, CE, CB, RCM, SAA, CCC
	Withstanding Voltage	I/P-O/P: 3.75kVac, <5mA, 60S
	Insulation Resistance	I/P-O/P: >100MΩ@500Vdc
	Safety Standards	ENEC: EN61347-1:2015, EN61347-2-13: 2014/A1: 2017, EN62384 2016/A1: 2009 CE-LVD: EN61347-2-13: 2014/A1: 2017, EN61347-1: 2015, EN62493: 2015 SAA: AS61347.2-13: 2018 CB: IEC61347-1: 2015, IEC61347-2-3: 2014, IEC 61347-2-13: 2014/AMD1: 2016 CCC: GB19510.1-2009, GB19510.14-2009
	EMI	CE-EMC/RCM: EN55015, EN61000-3-2, EN61000-3-3 CCC: GB/T17743, GB17625.1, GB17625.2
	EMS	CE-EMC/RCM: EN61000-4-2, 3, 4, 5 (lightning strike 1kV), 6, 11 CCC: GB/T17626.2, 3, 4, 5 (lightning strike 1kV), 6, 11
	ESD	Air 8kV, touch 4kV (Class B)
<b>Other Parameters</b>	IP Rating	IP20
	RoHS	RoHS 2.0 (EU) 2015/863
	Warranty Condition	5 years (Tc ≤80°C)
<b>Testing Equipment</b>	Digital power meter: CHROMA66202, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber; Everfine EMS61000-5B; Everfine EMS61000-4A, spectroanalyzer: KH3935, withstanding voltage tester: TH9201B, flicker tester (flicker-free coefficient test) 60N-01, etc.	
<b>Testing Remarks</b>	The above parameters are tested at the ambient temperature of 25°C, humidity of 50%, full load and input voltage of 230Vac without any special remarks.	

■ **Electrical Characteristics**


<b>Additional Remarks</b>	<ol style="list-style-type: none"> <li>1. It is recommended that our client install over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety.</li> <li>2. Please disconnect input AC power supply before adjusting the output current via the DIP switch.</li> <li>3. The PC shade, casing and plug for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above.</li> <li>4. The LED driver used in combination with the end device is one of the accessories in the whole light fixture, and its EMC is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC performance of LED driver before the whole light fixture is finished.</li> </ol>
---------------------------	--

■ **Product Characteristic Curves**


PF Curve

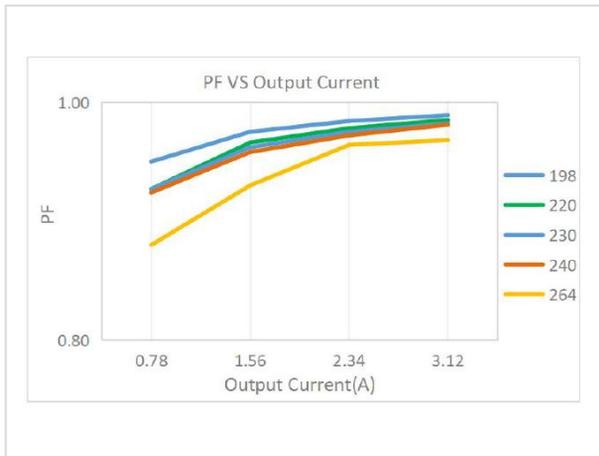

Efficiency Curve

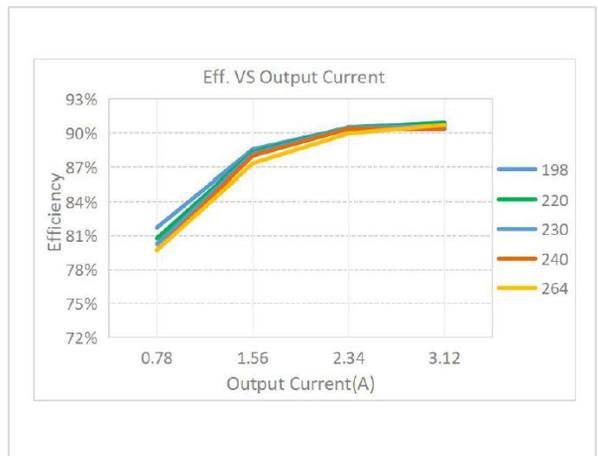

Lifetime Curve

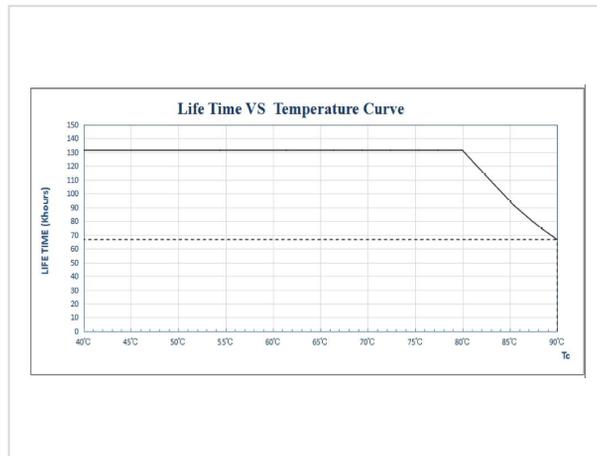


**■ Dimming Operation Instructions**

Product terminals

INPUT	
AC-L	Input terminal of AC live wire
AC-N	Input terminal of AC neutral wire


ONPUT	
LED+	Positive electrode output of LED driver
LED-	Negative electrode output of LED driver

Wiring Diagram of Triac Dimming Operation

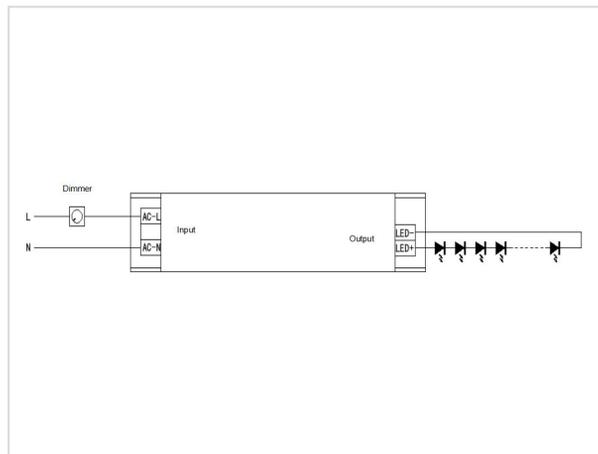


■ **Structure & Dimensions (unit: mm)**

Appearance Dimensions

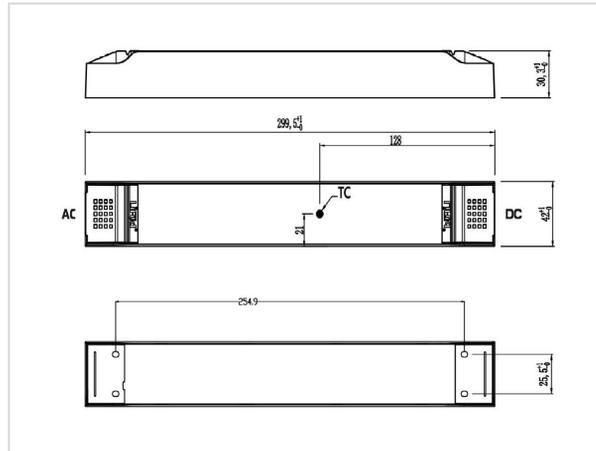

■ **Label**

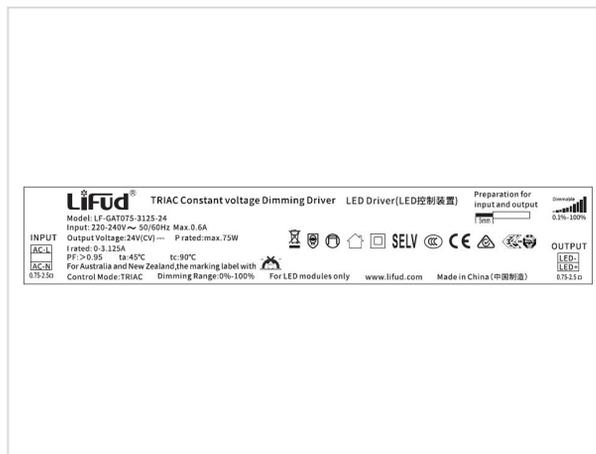

■ **Packaging Specifications**

Model	LF-GAT075-3125-24
Carton Size	400*310*170 mm (L*W*H)
Quantity	8 pcs/layer; 4 layers/ctn; 32 pcs/ctn
Weight	0.32 kg/pc; 10.8 kg/ctn

■ **Transportation and Storage**

**1. Transportation**

- Suitable transportation means: vehicles, boats and aeroplanes.
- In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact of LED driver as much as possible.

**2. Storage**

- The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

**Cautions**

- Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.
- Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.
- Man-made damage is beyond the scope of Lifud warranty service.

Remark: Lifud Tecnology Co., Ltd. reserves the right to interpret any contents of this specification.